




Bottom Discharge Hog

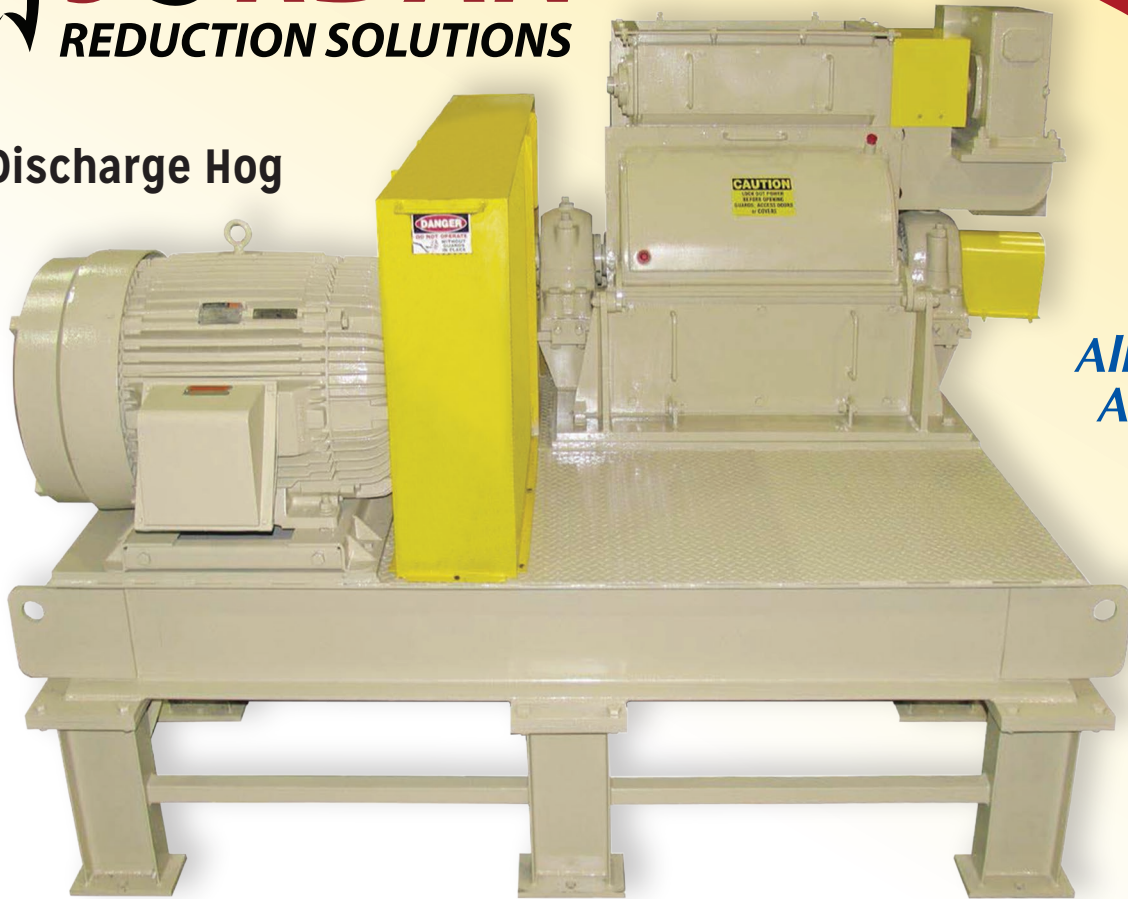


All American Made

Whatever your grinding job, there's a Jordan Reduction Solutions Bottom Discharge Hog that can do the job better and save you money.

Only Jordan Reduction Solutions offers you the staggered flying knife arrangement that provides greater efficiency in reducing most types of materials...plastic, rubber, wood, aluminum, chemicals, meat, glass, leather, copper wire, asphalt tile, asbestos—you name it.


The flying knife design reduces material by shaving rather than chopping, resulting in more uniform sized particles. Often, this means less grinding time to reduce material to the required size for further processing, transportation or discharge. This cutting action is also smoother, producing the lowest vibration, shock and heat buildup of any machine in their class. Horsepower requirements are also lower.

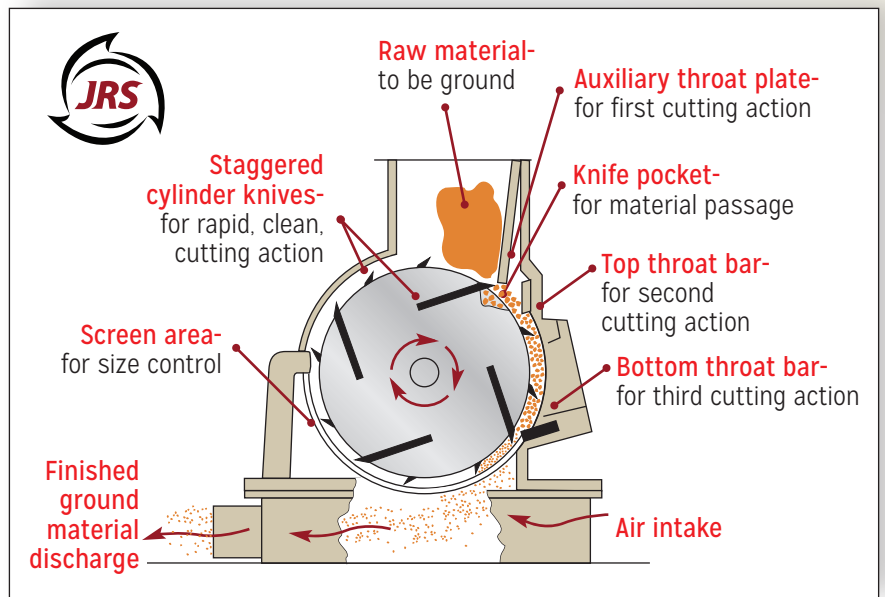

Toll Free: 1-888-733-8248
www.jordanreductionsolutions.com

Bottom Discharge Hog

The all steel, heavy duty cylinders feature an exclusive staggered knife arrangement that greatly reduces cutting shock, vibration and heat.

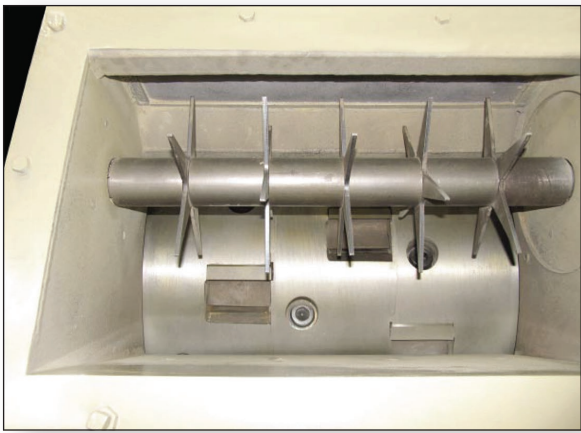

The Mitts & Merrill Rubber Hog by JORDAN REDUCTION SOLUTIONS has been a leader in processing rubber bales into minus 3/8" particles for over 75 years. Our new star feed system and optional talc systems, as well as our new screen removal system, makes this a very cost effective method to increase production.

Specifications

Model No.	Without Screen	BDH	13CD	13CE	14CE	14CF	14CG	14CH
	With Screen	BDHS	13CSD	13CSE	14CSE	14CSF	14CSG	14CSH
Height		28	39 1/2	39 1/2	44	44	44	44
Width		32	42	42	53	53	53	53
Length		38	50	66	66	75	84	95
Feed Opening ¹		10 X 11	15 X 18	15 X 27	20 X 27	20 X 36	20 X 45	20 X 54
Discharge Opening		13 1/2 X 20 1/2	22 X 25	25 X 31	30 X 31	30 X 40	30 X 49	30 X 58
Shaft Diameter		2 15/16	4 7/16	4 7/16	4 15/16	4 15/16	6 7/8	6 7/8
Shaft Bearing Size		2 7/16	2 15/16	3 15/16	3 15/16	3 15/16	3 15/16	4 7/16
Number of Knives		12	12	18	18	24	30	36
Dia. of Knife Swing		20 5/8	26 5/8	26 5/8	30 5/8	30 5/8	30 5/8	30 5/8
Shaft R.P.M. (Max.)		1800	1200	1200	1200	1200	1200	1200
Motor H.P. (Max.)		50	200	200	250	250	250	250
Weight		2200	4500	5535	10000	12000	19300	23100
Capacity*	Without Screen	3000	7500	11250	11250	15000	18750	22500
Lbs. Per Hr.	With Screen**	1800	4500	6750	6750	9000	11250	13500

¹ Feed Opening Size without auxiliary throat plate

*Capacities shown are for wood

**1" diameter holes

Features that make every JORDAN REDUCTION SOLUTIONS Bottom Discharge Hog a dependable and versatile performer:

- All steel cylinder and hardened steel knives
- Optional water cooling
- Interchangeable screens to control end product size
- Heavy duty, double row, tapered roller bearings
- Easy access openings for fast clean-up between runs



JORDAN
REDUCTION SOLUTIONS

Toll Free: 1-888-REDUCIT
1-888-733-8248
Fax: 1-205-849-5075

P.O. Box 170339
355 Clow Lane
Birmingham, AL 35217

Email: sales@jrs.com
Web: www.JRS.com and
jordanreductionsolutions.com